

Figure 1

2/5

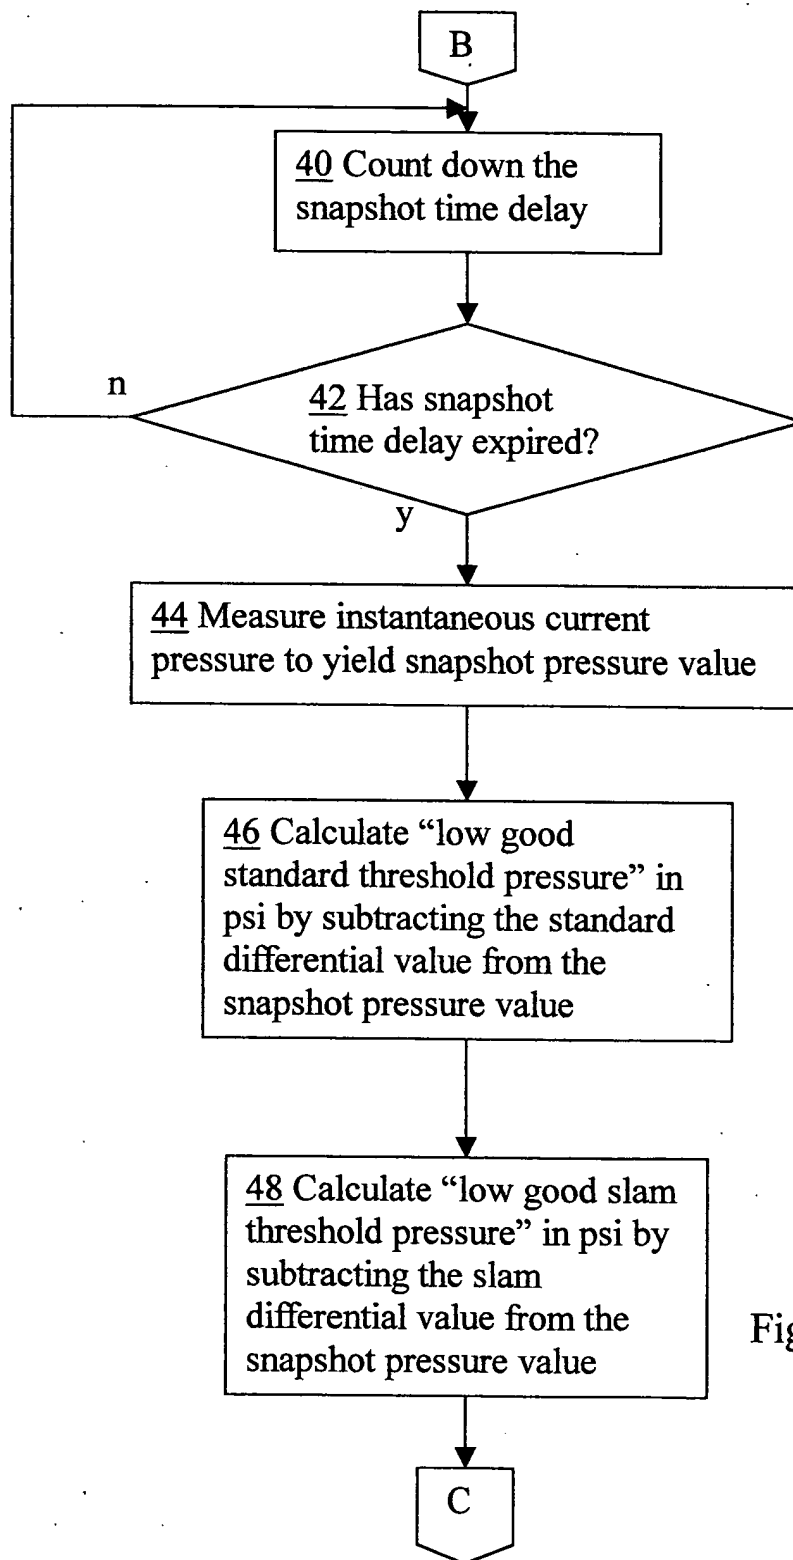


Figure 2

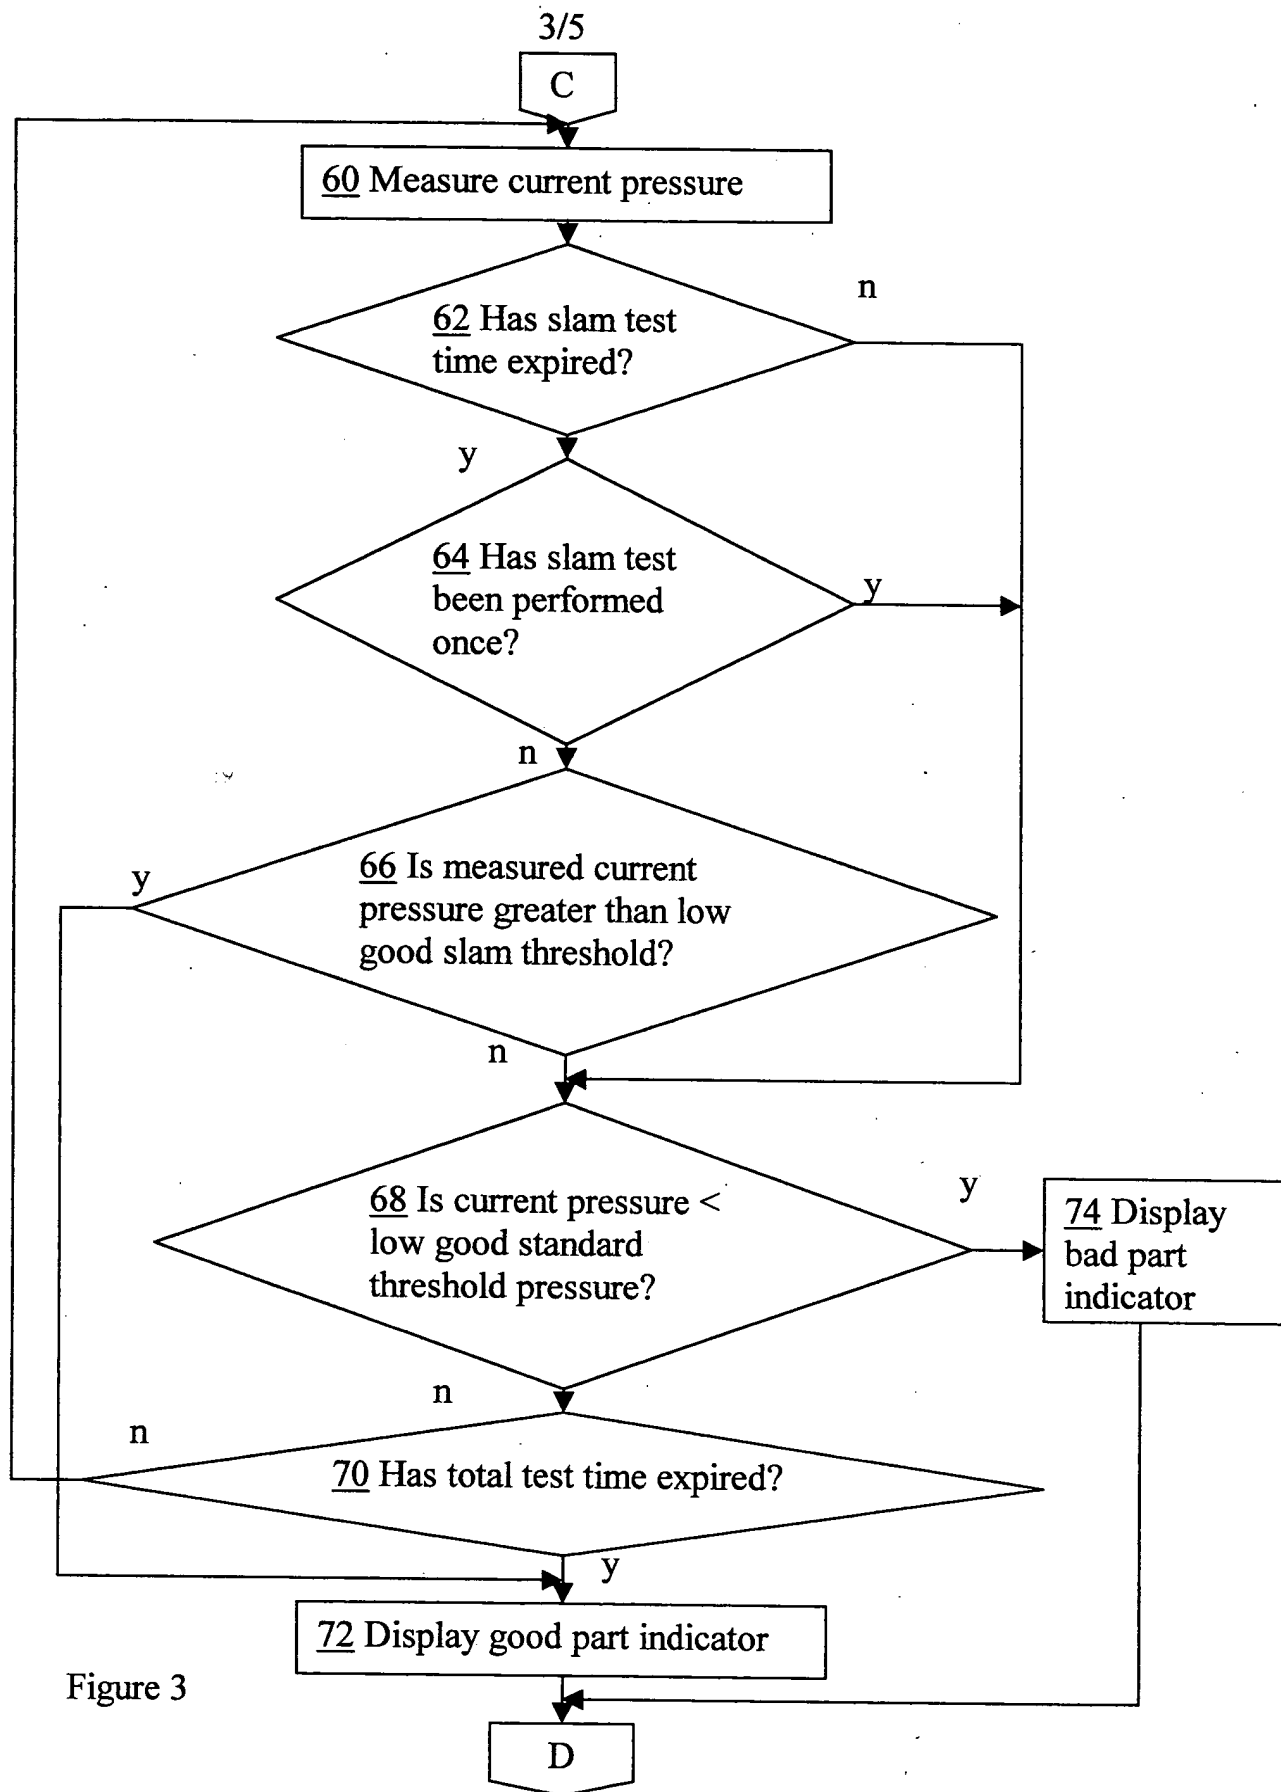


Figure 3

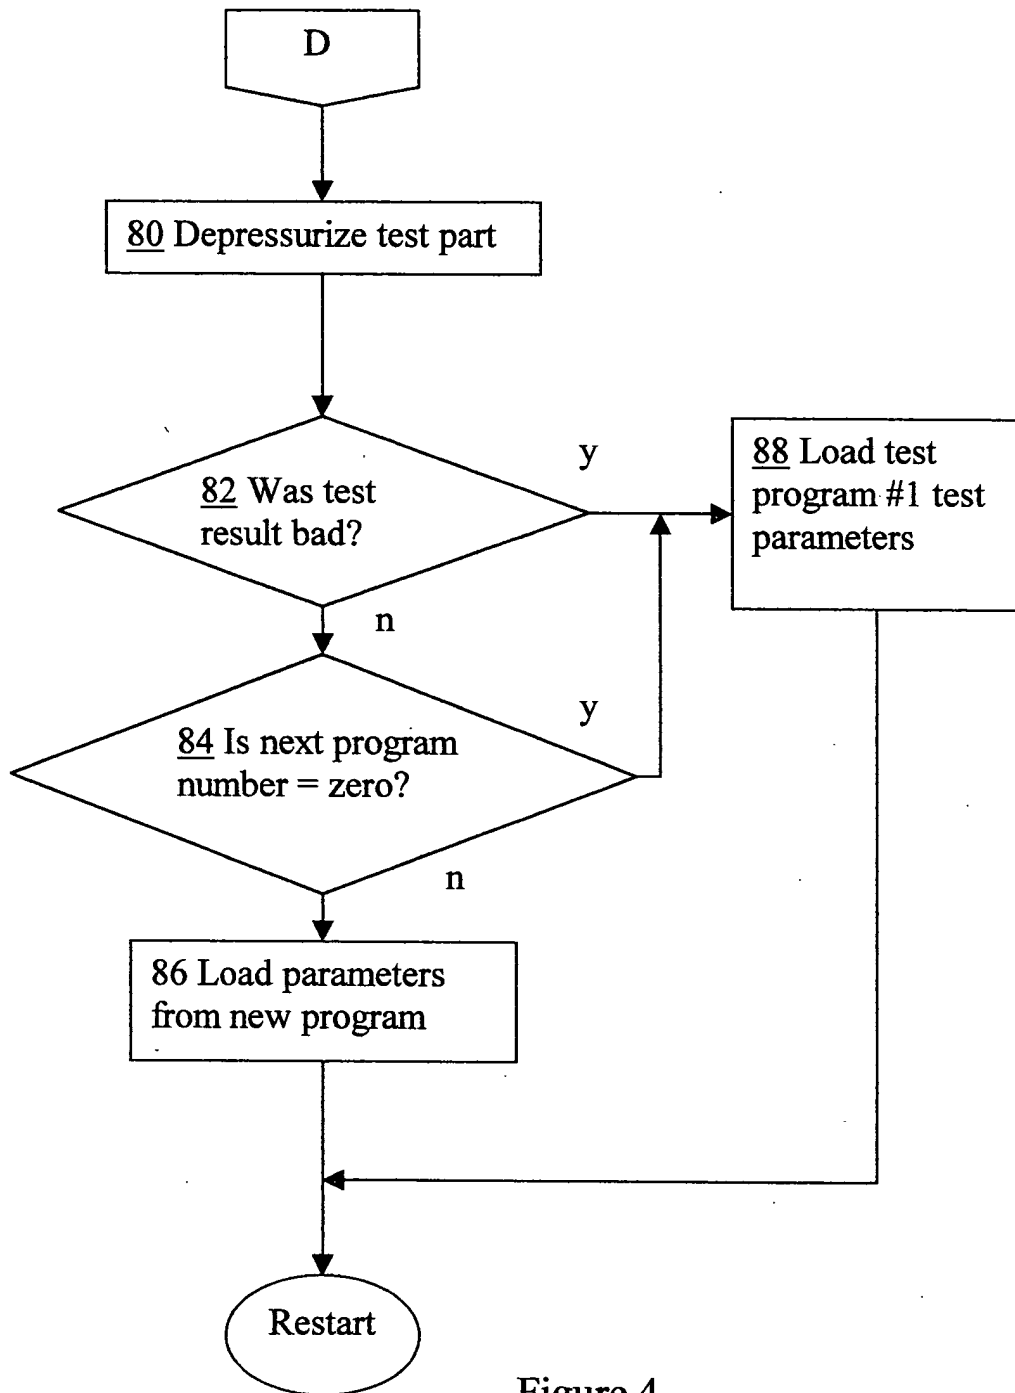


Figure 4

Test parameters		Approximate Estimated Values
1	test pressure value	90 psi
2	standard pressure differential value	.035 psi
3	total test time	15 seconds
4	snapshot time delay	4 seconds
5	maximum fill time (low air time)	2.8 seconds
6	minimum fill time	0.4 seconds
7	slam test time	1.1 seconds
8	slam pressure differential value	.001 psi
11	next test program	0 or 2

Figure 5